

Touchless Switch (gesture control)



Touchless Switch
Ref.: 512.TLR1.00 (Relais)
Ref.: 512.TLT1.00 (PNP/NPN)




Touchless Switch
Ref.: 512.TLR1.01 (Relais)
Ref.: 512.TLT1.01 (PNP/NPN)



Touchless Switch
Ref.: 512.TLR2.00 (Relais)



Touchless Switch
Ref.: 512.TLR3.00 (Relais)

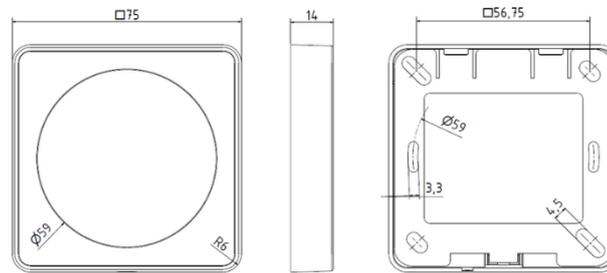

Touchless Switch

Based on our Touchless Switch customers avoid touching infected surfaces and low the risk of getting germs and viruses, which is magnificent since Corona has been spreading around the world. Therefore, geba wants to enhance customer's protection as much as possible. You open doors and gates completely touchless by using the gesture control and it works entirely through the capacitive technology. The Touchless Switch is characterized by its modern and aesthetic design. The rated geba technology has been constantly developed over the last years. There are no visible screws in the field of vision thanks to a new intelligent fixing technology. Through the integrated illumination the Touchless-Switch can be operated at any time. It can be wall-mounted with the help of a metal bracket (included).

Quick overview

- Illuminated Acryl Touchless Switch
- Available as a relay version or PNP/NPN version
- Capacitive Technology
- Avoid touching infected surfaces
- No additional logic is required
- Modern and aesthetic design
- Attachment with wall mounting plate. No visible screws in the field of vision.

Technical data

Housing	Metal frame, powder coated
Frontplate surface	Acryl
Operation voltage	12-24V DC Pulse output 1 Sec
Enclosure rating	IP 65
Ambient temperature	-30°C to +50°C
Connection	5-meter-cable Metal bracket inclusive Safety screw with bit

Visit us on Social Media



Geba GmbH



Geba GmbH



Fon: +49 2243-8804-0
Fax: +49 2243-8804-199
E-Mail: mailbox@geba.net

www.geba.net

geba Handels- und Entwicklungsgesellschaft mbH
Wecostraße 7-11
D-53783 Eitorf